


Mini relay I/O card

Back to: [1~3kVA / 5~10kVA](#)
[3ph monoblock / 3ph modular](#)

PN: 3915100474-S

SAP NAME: F DRY CONTACT CARD (MINI) FOR DCE

Description: Mini Relay I/O card expands communication ability of the UPS and can be installed in Mini card slot. Card allows monitoring of UPS by 3 output programmable dry contacts.

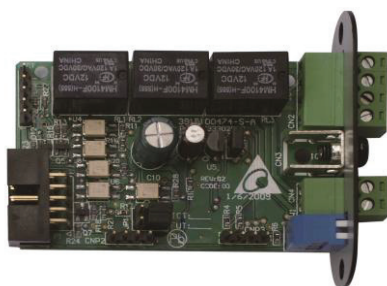

Technical specifications:

Size	68 X 43 mm
Weight	35g
Operating Temperature	0 ~ 40° C
Operating Humidity	10 ~ 80 %
Power Input	8 ~ 20V DC
Power Consumption	0.8 Watts

Features:

- SNMP agent and web server implemented for UPS.
- UPS status information presented as 3 contact closures.
- Configurable input signal as shutdown UPS or battery test.
- Programmable output contacts, monitors UPS events that users are most concerned about for various applications.
- Configurable UPS shutdown delay time.
- Protects up to 3 computers.
- Unattended graceful shutdown.

Applicable to UPS:

- N-series 1kVA.
- RT-series.
- EH-series.
- HPH-series.

