


Modbus card

Back to: [1~3kVA / 5~10kVA](#)
[3ph monoblock](#) / [3ph modular](#)

PN: 3915100422-S

SAP NAME: F MODBUS CARD FOR DELTA (TW)

Description: Convert status and parameter data of UPS to comply with the standard Modbus protocol. Modbus card can be installed in UPS Smart slot.

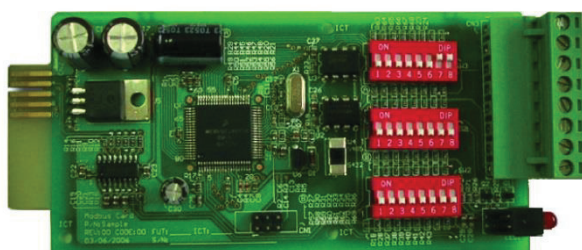

Technical specifications:

Operation temperature	0 ~ 40°C
Operation humidity	10 ~ 80 %
Input voltage	8-20 VDC
Power consumption	1,2W
Dimensions	130 x 60 mm
Weight	150 g

Features:

- Communications interface: 1 x RS232 port; 1 x RS485 or RS422.
- Device ID can be set to any number between 0~255.
- Terminating resistance of RS485 / 422 can be set by dip switch.
- Supports Modbus RTU format.
- Baud rate: 2400, 4800, 9600 or 19200.
- Data bit: 7 or 8.
- Parity check: Null, even or odd.

Applicable to UPS:

- N-series, except N 1kVA, R-series, M-series, Gaia series, RT-series.
- EH-series, HPH-series, NH+ series, DPH-series, DPS-series.

