


Relay I/O card

Back to: [1~3kVA / 5~10kVA](#)
[3ph monoblock](#) / [3ph modular](#)

PN: 3915100147-S

SAP NAME: F RELAY I/O CARD F FOR UPS

Description: Relay I/O card expands communication ability of the UPS and can be installed in Smart slot. Card allows monitoring of UPS with 6 output programmable dry contacts. 1 input dry contact can be set as UPS shutdown or

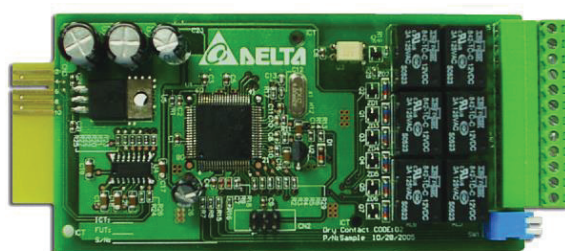

Technical specifications:

Operation temperature	0 ~ 40°C
Operation humidity	10 ~ 80 %
Input voltage	8-20 VDC
Power consumption	1,2W
Dimensions	130 x 60 mm
Weight	200 g
Output contact rating	24VD C/ 1A
Input contact rating	24VD C/ 10mA

Features:

- UPS status information presented as 6 contact closures.
- Programmable output contacts, monitors the UPS events that users really concern in different application practices.
- Output relays can be configured to either NC (Normal Close) or NO (Normal Open).
- Configurable UPS shutdown delay time.
- Configurable input signal as shutdown UPS or battery test.

Applicable to UPS:

- N-series, except N 1kVA, R-series, M-series, Gaia series, RT-series.
- EH-series, HPH-series, NH+ series, DPH-series, DPS-series.

