

Power distribution unit – metered, 3phase, 16A


Back to: [1~3kVA / 5~10kVA](#)
[3ph monoblock](#) / [3ph modular](#)

PN: PDU2421A3910001

SAP NAME: F PDU I=380/400V 3,Y 16A F-R

Description: Power distribution unit for standard rack cabinet installation. PDU provides optimal power distribution for devices supplied by UPS.
Metered PDU with 2xRS232 interface, display, LEDs and optional SNMP card.
Each load group is protected by branch circuit breaker.

PDU dimensions:	48x1560x50/90 mm (WxHxD)
Weight:	6,06 kg
Input:	220/380, 230/400, IEC309-16A-5W plug
Output:	200-240V, IEC320 C13 (36x) and IEC320 C19 (3x)
Protection:	3 x 20A/2P breaker
Display:	current in Amperes for selected load group
LEDs:	alarm conditions

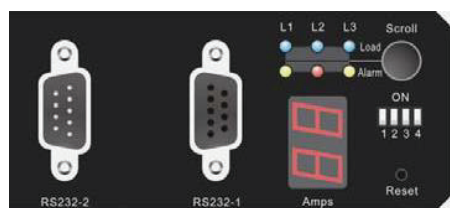

Applicable to UPS (UPS output power distribution required):

- HPH-series
- NH+ series.
- DPH-series.
- DPS-series.

