

RPDC Frame for DPH

Back to: [1~3kVA / 5~10kVA](#)
[3ph monoblock](#) / [3ph modular](#)

PN: PDC130CA0800135

SAP NAME:

Description: Rack-mount PDC for DPH 75/150kVA allows installation of maximum 6 hot-swappable 16 or 32A breaker modules (connection for 18 branches). RPDC supports SNMP IPv6 card and built-in CAN bus port allows communication with UPS.

Module dimensions: 430 x 173 x 665 mm (WxHxD)


Weight: up to 38 kg

Capacity: 1 to 6 hot-swappable breaker modules:

16A - 3915101246-S, up to 3kVA

32A - 3915101243-S, up to 5kVA

Interface: RS-232 port, CAN bus port, Smart slot, Output dry contact, REPO

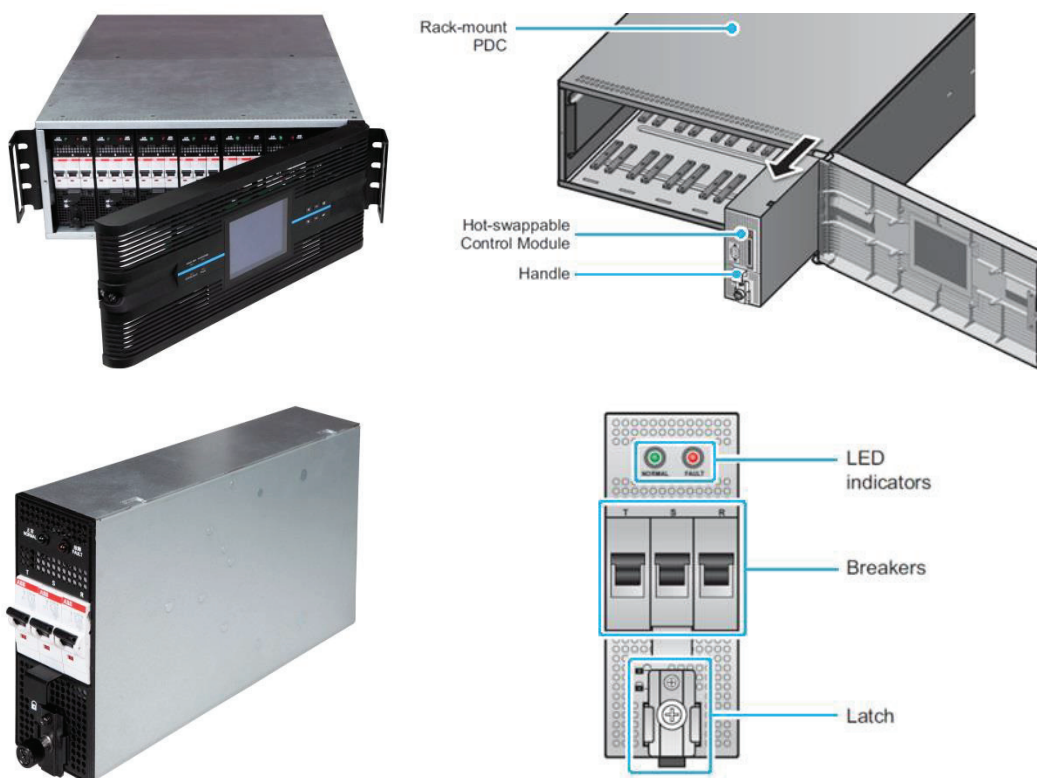

Applicable to UPS:

- DPH-series 75kVA and 150kVA.

